


XBA-UCD7(USD4+CAD3) Option Switch Settings

Supported bill USD 1, 5, 10, 20 4bills.
CAD 5, 10, 20 3bills.

	FUNCTION	SW1	SW2	SW3	SW4	SW5	SW6	SW7	SW8
★	Reject USD 1 & USD / CAD 5	ON							
★	Accept USD 1 & USD / CAD 5	OFF							
★	Reject USD / CAD 10		ON						
★	Accept USD / CAD 10		OFF						
★	Reject USD / CAD 20			ON					
★	Accept USD / CAD 20			OFF					
★	Accept USD+CAD				OFF	OFF			
	Accept USD				OFF	ON			
	Accept CAD				ON	OFF			
	Reserved				ON	ON			
	Disable Bill Reject 4 Times BA Stop By 30 Sec					ON			
★	Enable Bill Reject 4 Times BA Stop By 30 Sec					OFF			
	Stack Banknote when Power-up						ON		
★	Reject Banknote when Power-up						OFF		
	Reserved							ON	
★	Reserved							OFF	

This dip switch is located at the side of XBA.

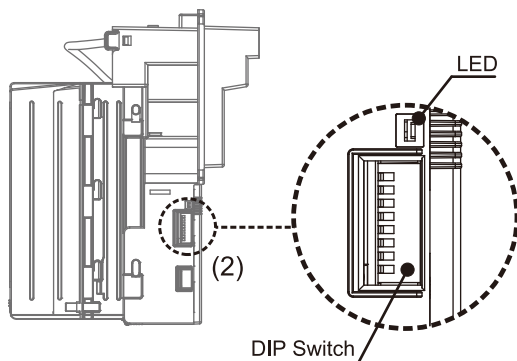

Currency Assign Data

Interface Bill value	ICT002U	ICT104U	ICT104V	Pulse	MDB
BV1	USD 1	USD 1	USD 1	USD 1	USD 1
BV2	USD 5	USD 5	USD 5	USD 5	USD 5
BV3	USD 10	USD 10	USD 10	USD 10	USD 10
BV4	USD 20	USD 20	USD 20	USD 20	USD 20
BV5	CAD 5	CAD 5	CAD 5	CAD 5	CAD 5
BV6	CAD 10	CAD 10	CAD 10	CAD 10	CAD 10
BV7	CAD 20	CAD 20	CAD 20	CAD 20	CAD 20

XBA-UCD7(USD4+CAD3)(Pulse/MDB/ICT)

	FUNCTION	SW1	SW2	SW3	SW4	SW5	SW6	SW7	SW8	
★	Inhibit Active HIGH	ON								
	Inhibit Active LOW	OFF								
★	Colorful light		OFF	OFF						
	The green light flashes		OFF	ON						
	Reserved		ON	OFF						
	No light		ON	ON						
★	Reserved				ON					
	Reserved				OFF					
★	Pulse Mode	MDB Mode		ICT104V Mode		ON				
	Credit-Pulse Normal HIGH	SCALING_FACTOR 100 DECIMAL_PLACE_OFF 2	Connect with coin change							
	Credit-Pulse Normal LOW	SCALING_FACTOR 1 DECIMAL_PLACE_OFF 0	Connect with ICT JPSTD Converter board							
★	Pulse Mode						ON			
	Other Mode						OFF			
★	Pulse Mode	Other Mode							OFF	OFF
	1 pulse / USD&CAD 1	MDB Mode								
	2 pulses / USD&CAD 1	ICT002U Mode								
	4 pulses / USD&CAD 1	ICT104U Mode								
	20 pulses / USD&CAD 1	ICT104V Mode								

★ Manufacture setting

After setting dip switch of the credit pulses, you should reset the bill acceptor again.

Note : 1. Calibration card is needed.

2. 1 USD = 1 CAD

This dip switch is located on the CPU board, remove the CPU board cover first.

