

XBA-USD6 Option Switch Settings


Supported bill USD 1, 5, 10, 20, 50, 100 6bills.

	FUNCTION	SW1	SW2	SW3	SW4	SW5	SW6	SW7	SW8
	Reject USD 1	ON							
★	Accept USD 1	OFF							
	Reject USD 5		ON						
★	Accept USD 5		OFF						
	Reject USD 10			ON					
★	Accept USD 10			OFF					
	Reject USD 20				ON				
★	Accept USD 20				OFF				
	Reject USD 50 & 100					ON			
★	Accept USD 50 & 100					OFF			
	Disable Bill Reject 4 Times BA Stop By 30 Sec						ON		
★	Enable Bill Reject 4 Times BA Stop By 30 Sec						OFF		
	Stack Banknote when Power-up							ON	
★	Reject Banknote when Power-up							OFF	
	Reserved								ON
★	Reserved								OFF

★ Manufacture setting

Note.(1) After setting dip switch of the credit pulses,you should reset the bill acceptor again.
(2) Calibration card is needed.

This dip switch is located at the side of XBA.

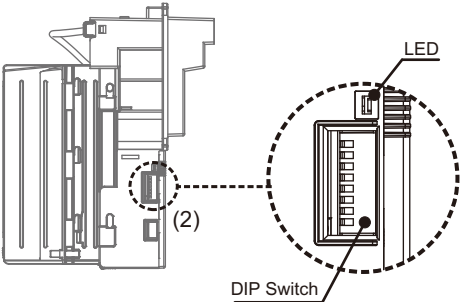

Currency Assign Data

Interface	Pulse	MDB	ICT104V	ccNet	ICT106U
Bill value					
BV1	USD 1	USD 1	USD 1	USD 1	USD 1
BV2	USD 5		USD 5	USD 5	USD 5
BV3	USD 10	USD 5	USD 10	USD 10	USD 10
BV4	USD 20	USD 10	USD 20	USD 20	USD 20
BV5	USD 50	USD 20	USD 50	USD 50	USD 50
BV6	USD 100	USD 50	USD 100	USD 100	USD 100
BV7		USD 100			

XBA-USD6 (Pulse/MDB/ICT106U/ccNet/ICT104V)

	FUNCTION		SW1	SW2	SW3	SW4	SW5		SW6	SW7	SW8		
★	Inhibit Active HIGH		ON										
	Inhibit Active LOW		OFF										
★	Reserved			ON									
	Reserved			OFF									
★	Reserved				ON								
	Reserved				OFF								
★	Reserved					ON							
	Reserved					OFF							
★	Reserved					ON							
	Reserved					OFF							
★	Pulse Mode		MDB Mode		ccNet Mode		ICT104V Mode						
	Credit-Pulse Normal HIGH		SCALING_FACTOR 100 DECIMAL_PLACE_OFF 2		9600 Baud Rate		Connect with coin changer					ON	
★	Credit-Pulse Normal LOW		SCALING_FACTOR 1 DECIMAL_PLACE_OFF 0		19200 Baud Rate		Connect with ICT JPSTD converter board		OFF				
	Pulse Mode											ON	
★	Other Mode									OFF			
★	Pulse Mode				Other Mode								
	1 pulse / USD 1				MDB Mode								
★	2 pulses / USD 1				ICT106U Mode							OFF	ON
	5 pulses / USD 1				ccNet Mode							ON	OFF
★	20 pulses / USD 1				ICT104V Mode							ON	ON

★ Manufacture setting

This dip switch is located on the CPU board, remove the CPU board cover first.

