


## XBA-TXY6(TRY3+USD2+EUR1) Option Switch Settings

**Supported bill**    **Lira**    **5, 10, 20,**    **3bills.**  
                               **USD**    **1, 5**                    **2bills.**  
                               **EUR**    **5**                    **1bills.**

|   | FUNCTION                                         | SW1 | SW2 | SW3 | SW4 | SW5 | SW6 | SW7 | SW8 |
|---|--------------------------------------------------|-----|-----|-----|-----|-----|-----|-----|-----|
| ★ | Reject Lira 5 & 10                               | ON  |     |     |     |     |     |     |     |
|   | Accept Lira 5 & 10                               | OFF |     |     |     |     |     |     |     |
| ★ | Reject Lira 20                                   |     | ON  |     |     |     |     |     |     |
|   | Accept Lira 20                                   |     | OFF |     |     |     |     |     |     |
| ★ | Reject € 5                                       |     |     | ON  |     |     |     |     |     |
|   | Accept € 5                                       |     |     | OFF |     |     |     |     |     |
| ★ | Reject USD 1                                     |     |     |     | ON  |     |     |     |     |
|   | Accept USD 1                                     |     |     |     | OFF |     |     |     |     |
| ★ | Reject USD 5                                     |     |     |     | ON  |     |     |     |     |
|   | Accept USD 5                                     |     |     |     | OFF |     |     |     |     |
| ★ | Disable Bill Reject 4 Times<br>BA Stop By 30 Sec |     |     |     |     | ON  |     |     |     |
|   | Enable Bill Reject 4 Times<br>BA Stop By 30 Sec  |     |     |     |     | OFF |     |     |     |
| ★ | Stack Banknote when Power-up                     |     |     |     |     |     |     | ON  |     |
|   | Reject Banknote when Power-up                    |     |     |     |     |     |     | OFF |     |
| ★ | Reserved                                         |     |     |     |     |     |     |     | ON  |
|   | Reserved                                         |     |     |     |     |     |     |     | OFF |

This dip switch is located at the side of XBA.

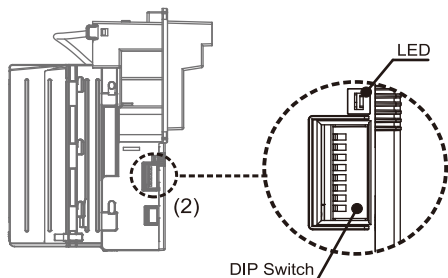


### Currency Assign Data

| Interface<br>Bill value | ICT104U | ICT104V | Pulse   | MDB     |
|-------------------------|---------|---------|---------|---------|
| BV1                     | Lira 5  | Lira 5  | Lira 5  | Lira 5  |
| BV2                     | Lira 10 | Lira 10 | Lira 10 | Lira 10 |
| BV3                     | Lira 20 | Lira 20 | Lira 20 | Lira 20 |
| BV4                     | Euro 5  | Euro 5  | Euro 5  | Euro 5  |
| BV5                     | USD 1   | USD 1   | USD 1   | USD 1   |
| BV6                     | USD 5   | USD 5   | USD 5   | USD 5   |

## XBA-TXY6(TRY3+USD2+EUR1)(Pulse/MDB/ICT104U/ICT104V)

| FUNCTION   |                          | SW1                                                           | SW2 | SW3 | SW4                                       | SW5 |     | SW6 | SW7 | SW8 |
|------------|--------------------------|---------------------------------------------------------------|-----|-----|-------------------------------------------|-----|-----|-----|-----|-----|
| ★          | Inhibit Active HIGH      | ON                                                            |     |     |                                           |     |     |     |     |     |
|            | Inhibit Active LOW       | OFF                                                           |     |     |                                           |     |     |     |     |     |
| ★          | Reserved                 |                                                               | ON  |     |                                           |     |     |     |     |     |
|            | Reserved                 |                                                               | OFF |     |                                           |     |     |     |     |     |
| ★          | Reserved                 |                                                               |     | ON  |                                           |     |     |     |     |     |
|            | Reserved                 |                                                               |     | OFF |                                           |     |     |     |     |     |
| ★          | Reserved                 |                                                               |     |     | ON                                        |     |     |     |     |     |
|            | Reserved                 |                                                               |     |     | OFF                                       |     |     |     |     |     |
| Pulse Mode |                          | MDB Mode                                                      |     |     | ICT104V Mode                              |     |     |     |     |     |
| ★          | Credit-Pulse Normal HIGH | Scaling Factor (SF) = 100<br>Decimal Point Position (DPP) = 2 |     |     | Connect with coin changer                 |     | ON  |     |     |     |
|            | Credit-Pulse Normal LOW  | Scaling Factor (SF) = 1<br>Decimal Point Position (DPP) = 0   |     |     | Connect with ICT JPSTD<br>converter board |     | OFF |     |     |     |
| ★          | Pulse Mode               |                                                               |     |     |                                           |     |     | ON  |     |     |
|            | Other Mode               |                                                               |     |     |                                           |     |     | OFF |     |     |
| ★          | Pulse Mode               | Other Mode                                                    |     |     |                                           |     |     |     |     |     |
|            | 1 pulse / Lira 1         | MDB Mode                                                      |     |     |                                           |     |     |     |     |     |
|            | 5 pulses / Lira 1        | Reserved                                                      |     |     |                                           |     |     |     |     |     |
|            | 10 pulses / Lira 1       | ICT104U Mode                                                  |     |     |                                           |     |     |     |     |     |
|            | 25 pulses / Lira 1       | ICT104V Mode                                                  |     |     |                                           |     |     |     |     |     |

This dip switch is located on the CPU board, remove the CPU board cover first.

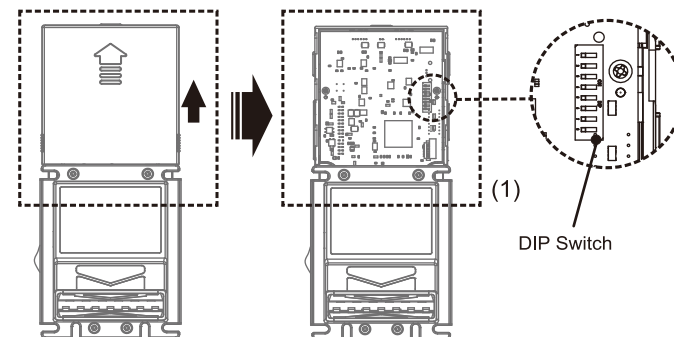

### ★ Manufacture setting

Note : 1.Please reset the bill acceptor after set the dip switch.

2.Calibration card is needed.

EUR \$5 display TRY 110 (Only for Pulse,MDB)

USD \$1 display TRY 20 (Only for Pulse,MDB)

USD \$5 display TRY 100 (Only for Pulse,MDB)