


XBA-TXY9(TRY3+USD3+EUR3) Option Switch Settings

Supported bill **Lira** **50, 100, 200** **3bills.**
 USD **1, 5, 10** **3bills.**
 EUR **5, 10, 20** **3bills.**

FUNCTION	SW1	SW2	SW3	SW4	SW5	SW6	SW7	SW8
★ Reject Lira 50 & 100	ON							
★ Accept Lira 50 & 100	OFF							
★ Reject Lira 200		ON						
★ Accept Lira 200		OFF						
★ Reject € 5 & 10			ON					
★ Accept € 5 & 10			OFF					
★ Reject € 20				ON				
★ Accept € 20				OFF				
★ Reject USD 1 & 5 & 10					ON			
★ Accept USD 1 & 5 & 10					OFF			
★ Disable Bill Reject 4 Times BA Stop By 30 Sec						ON		
★ Enable Bill Reject 4 Times BA Stop By 30 Sec						OFF		
★ Stack Banknote when Power-up							ON	
★ Reject Banknote when Power-up							OFF	
★ Reserved								ON
★ Reserved								OFF

This dip switch is located at the side of XBA.

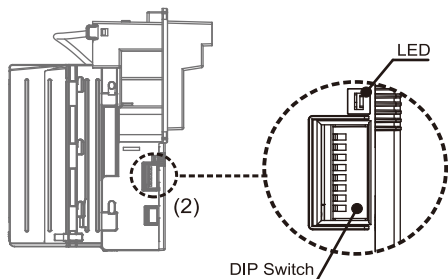

Currency Assign Data

Interface Bill value	ICT104U	ICT104V	Pulse	MDB
BV1	Lira 50	Lira 50	Lira 50	Lira 50
BV2	Lira 100	Lira 100	Lira 100	Lira 100
BV3	Lira 200	Lira 200	Lira 200	Lira 200
BV4	Euro 5	Euro 5	Euro 5	Euro 5
BV5	Euro 10	Euro 10	Euro 10	Euro 10
BV6	Euro 20	Euro 20	Euro 20	Euro 20
BV7	USD 1	USD 1	USD 1	USD 1
BV8	USD 5	USD 5	USD 5	USD 5
BV9	USD 10	USD 10	USD 10	USD 10


Appendix

XBA-TXY9(TRY3+USD3+EUR3)(Pulse/MDB/ICT104U/ICT104V)

FUNCTION		SW1	SW2	SW3	SW4	SW5		SW6	SW7	SW8
★	Inhibit Active HIGH	ON								
	Inhibit Active LOW	OFF								
★	Reserved		ON							
	Reserved		OFF							
★	Reserved			ON						
	Reserved			OFF						
★	Reserved				ON					
	Reserved				OFF					
Pulse Mode		MDB Mode			ICT104V Mode					
★	Credit-Pulse Normal HIGH	Scaling Factor (SF) = 100 Decimal Point Position (DPP) = 2			Connect with coin changer		ON			
	Credit-Pulse Normal LOW	Scaling Factor (SF) = 1 Decimal Point Position (DPP) = 0			Connect with ICT JPSTD converter board		OFF			
★	Pulse Mode							ON		
	Other Mode							OFF		
★	Pulse Mode	Other Mode								
	1 pulse / Lira 10	MDB Mode								
	5 pulses / Lira 10	Reserved								
	10 pulses / Lira 10	ICT104U Mode								
	25 pulses / Lira 10	ICT104V Mode								
								ON	OFF	ON

★ Manufacture setting

This dip switch is located on the CPU board, remove the CPU board cover first.

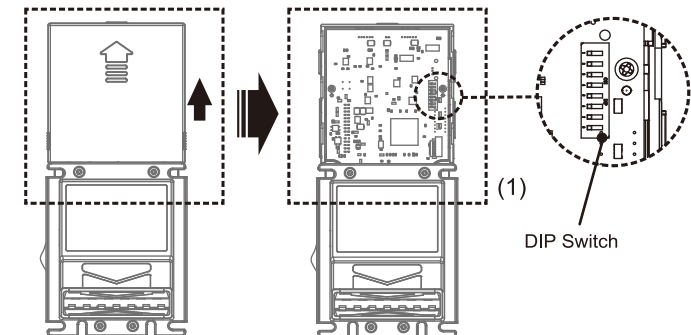

Note : 1.Please reset the bill acceptor after set the dip switch.

2.Calibration card is needed.

EUR \$5 display TRY 250 (Only for Pulse,MDB)

EUR \$10 display TRY 500 (Only for Pulse,MDB)

EUR \$20 display TRY 1000 (Only for Pulse,MDB)

USD \$1 display TRY 40 (Only for Pulse,MDB)

USD \$5 display TRY 200 (Only for Pulse,MDB)

USD \$10 display TRY 400 (Only for Pulse,MDB)